


AD.3.M... MECHANICALLY OPERATED TYPE VALVES CETOP 3/NG6



1

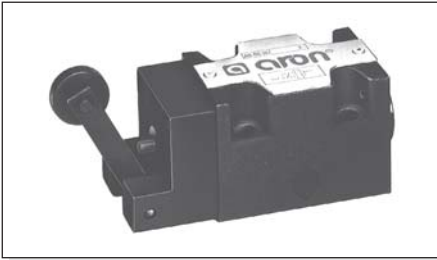

Max. pressure ports P/A/B	320 bar
Max. pressure port T	160 bar
Max. flow	60 l/min
Minimum operating force - see note (*)	2,5 Kg
Maximum operating force - see note (**)	13 Kg
Cam angle	27°
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	1 Kg

- Possible mountings: E / F / G / H
- Ordering code see page before
- Note: (*) In the absence of counter-pressure at port T (***) with a pressure of 160 bar at port T

OVERALL DIMENSIONS

Stroke 12,4 mm
Working stroke 3 mm

Stroke 12,4 mm
Working stroke 3 mm

Fixing screws UNI 5931 M5x30 with material specifications min. 8.8
Tightening torque 5 Nm / 0.5 Kgm

Support plane specifications

EAD3M - 02/2000/e

AD.3.D... DIRECT MECHANICALLY OPERATED TYPE VALVES CETOP 3/NG6



Max. pressure ports P/A/B	320 bar
Max. pressure port T	20 bar
Max. flow	60 l/min
Operating force - see note (*)	6 Kg
Fluid viscosity	10 ÷ 500 mm ² /s
Fluid temperature	0°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	1,5 Kg

- Possible mountings: E / F / G / H
- Ordering code see page before
- Note: (*) In the absence of counter-pressure at port T

OVERALL DIMENSIONS

Stroke 6 mm
Extra stroke 2 mm
Working stroke 3 mm

Stroke 6 mm
Extra stroke 2 mm
Working stroke 3 mm

Fixing screws UNI 5931 M5x30 with material specifications min. 8.8
Tightening torque 5 Nm / 0.5 Kgm

Support plane specifications

EAD3D - 02/2000/e