



AM.2.UD...

SCREWS AND STUDS

CH. IV PAGE 6

AM.2.UD... MODULAR DIRECT CHECK VALVES CETOP 2



AM.2.UD type modular check valves allow one way free flow, while preventing any flow in the opposite direction by means of a conical seated poppet.

They are available on single P and T lines (see hydraulic symbols).

1 bar spring is standard, while a 5 bar rated spring is available on request.


Max. operating pressure	250 bar
Minimum opening pressure spring 1	1 bar
Minimum opening pressure spring 5	5 bar
Max. flow	20 l/min
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm ² /s a 50°C
Fluid temperature	-20°C ÷ 75°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $\beta_{25} \geq 75$
Weight	0,4 Kg

4


ORDERING CODE

- AM** Modular valve
- 2** CETOP 2/NG4
- UD** Direct check valve
- *** Control on lines **P / T**
- *** Minimum opening pressure
1 = 1 bar
5 = 5 bar
- **** **00** = No variant
V1 = Viton
- 1** Serial No.

HYDRAULIC SYMBOLS

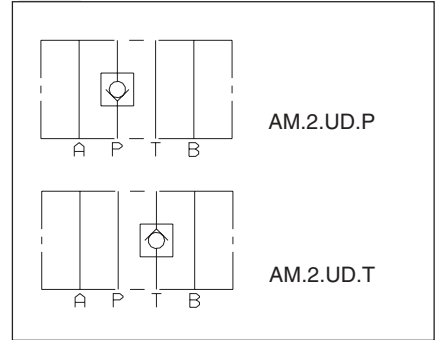

PRESSURE DROPS

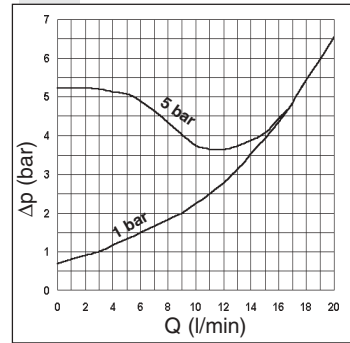

OVERALL DIMENSIONS

