

LMP 400 - 401 430 - 431





LMP

SERIES



400 - 401
430 - 431

Working pressure
60/50 bar

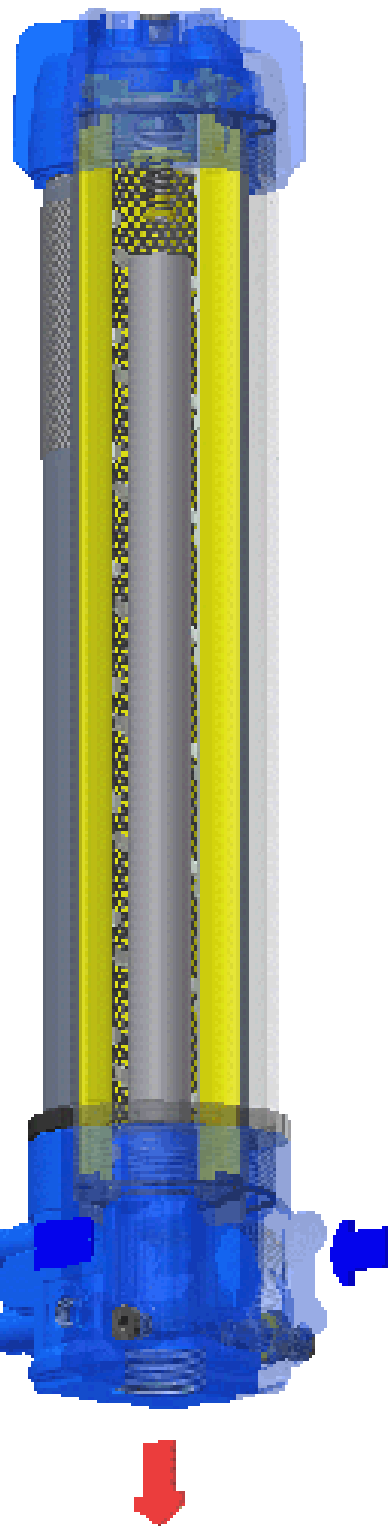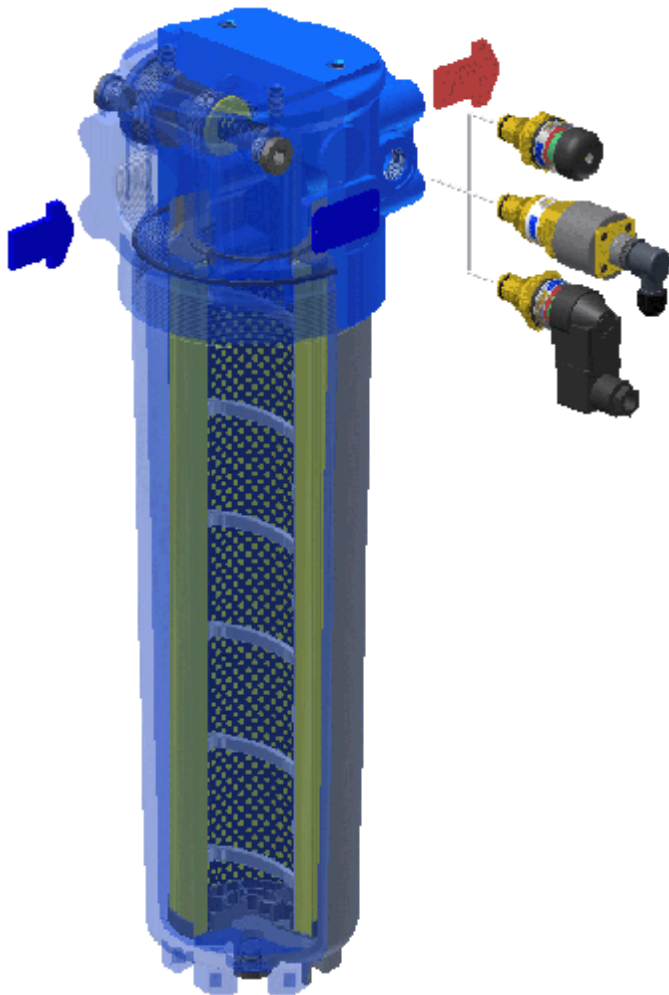

Style S

Style B



Technical data

Filter housing (Materials)

- Head: Anodised Aluminium
- Housing: Anodised Aluminium
- Bypass valve: Steel

Pressure

LMP 400 length: 2 - 3 - 4

- Working pressure: 60 bar (6 MPa)
- Test pressure: 90 bar (9 MPa)
- Burst pressure: 180 bar (18 MPa)
- Pulsed pressure fatigue test: 1.000.000 cycles with pressure from 0 to 60 bar (6 MPa)

LMP 400 length: 5 - 6

- Working pressure: 50 bar (5 MPa)
- Test pressure: 75 bar (7,5 MPa)
- Burst pressure: 150 bar (15 MPa)
- Pulsed pressure fatigue test: 1.000.000 cycles with pressure from 0 to 50 bar (5 MPa)

Temperature

- From -25°C to +110°C

Bypass valve

- Opening pressure 3.5 bar \pm 10%
- Other opening pressures on request.

Δp Elements type

- Series N and W elements: 20 bar
- Oil flow from exterior to interior.

Seals

- Standard NBR series A
- Optional FPM series V

Weights (kg)

Length

- LMP400 -2 6.7
- LMP400 -3 7.3
- LMP400 -4 8.1
- LMP400 -5 11.3
- LMP400 -6 14.4

Volumes (dm³)

Length

- LMP400 -2 3.5
- LMP400 -3 5
- LMP400 -4 6.5
- LMP400 -5 9.5
- LMP400 -6 13.5

Connections

- In-line Inlet/Outlet LMP 400 - 430
- 90° Inlet/outlet LMP 401 - 431

Compatibility

- Housings compatible with: Mineral oils to ISO 2943 - aqueous emulsions synthetic fluids, water and glycol.

- The filter elements are compatible with: Mineral oils to ISO 2943, Synthetic fluids Aqueous emulsions, water and glycol (series W required).
- NBR seals series A, compatible with: Mineral oils to ISO 2943 - aqueous emulsions synthetic fluids, water and glycol.
- V series FPM seals, compatible with: Synthetic fluids type HS-HFDR-HFDS-HFDU To ISO 2943

Filter Element Area

Filter element in stainless steel mesh


Type	2	3	4	5	6
CU 400	3300	4950	6550	10200	15300

Values expressed in cm²

Filter housing Δp pressure drop


The curves are plotted utilising mineral oil with density of 0.86 kg/dm³ to ISO 3968.

Δp varies proportionally with density.

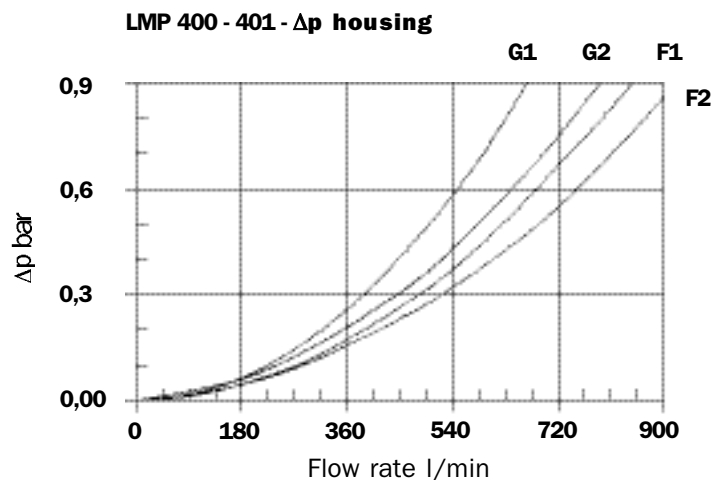


Valves

Bypass valve pressure drop

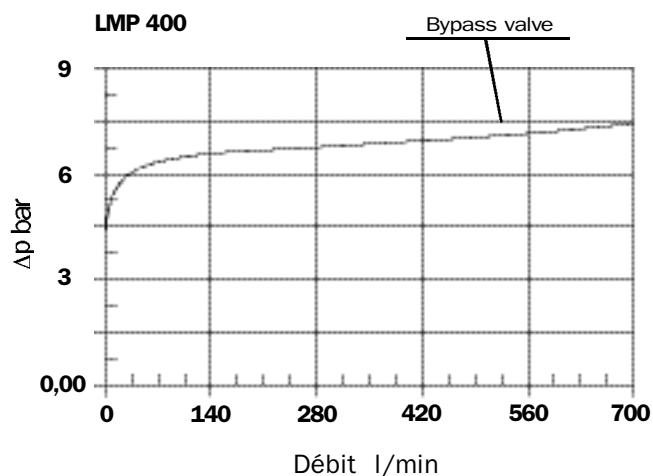

Option P02 for LMP 430/431

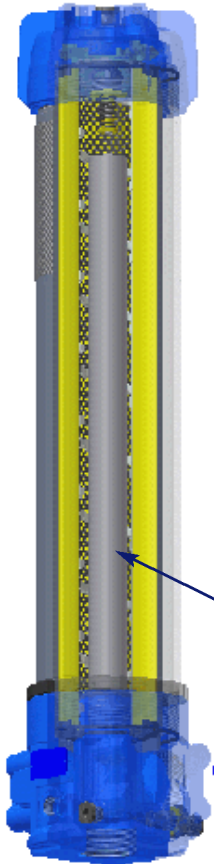

Option P02 “Internal tube for reduced flow rate” is recommended for flow rate values below 100/150 l/min. The use of option P02 makes it easier to fill the housing with the operating fluid.

P02 “Internal tube for reduced flow rates”

Recommended maximum flow rate

- Pressure drop of filter assembly equal to Δp 0.6 bar.
- Oil kinematic viscosity 30 mm²/s (cSt).
- Density 0.86 kg/dm³.
- Connections of filter under test G 2 1/2”.

Recommended maximum flow rate

Recommended maximum flow rate for filters installed on lubrication lines, return or in-line filters is defined by the maximum oil velocity in the connections.

For filters mounted on Off-Line lines the maximum recommended flow rate is defined by the pressure drop of the filter element.

Filter for pressurised lubrication, max. oil velocity 2.5 m/sec.
Return or in-line filter, max oil velocity 5 m/sec.

Oil velocity	Connections		
	1 1/2”	2”	2 1/2”
2,5 m/sec.	120	300	500
5 m/sec.	240	600	1000

Flow rate l/min.


Off-Line filter, filter element recommended maximum pressure drop must be equal to Δp 0.2 ÷ 0.3 bar.

Filter element type	Flow rate l/min Series N	Filter length
A03	180	2
A06	215	
A10	325	
A16	360	
A25	460	
M25	660	
P10	470	
P25	500	
<hr/>		
A03	245	3
A06	295	
A10	420	
A16	460	
A25	540	
M25	700	
P10	580	
P25	600	
<hr/>		
A03	305	4
A06	350	
A10	480	
A16	510	
A25	575	
M25	720	
P10	600	
P25	630	
<hr/>		
A03	405	5
A06	445	
A10	550	
A16	600	
A25	660	
M25	740	
P10	640	
P25	670	
<hr/>		
A03	450	6
A06	520	
A10	610	
A16	630	
A25	670	
M25	740	
P10	650	
P25	670	

Dimensions




LMP 400

Length 2-3-4

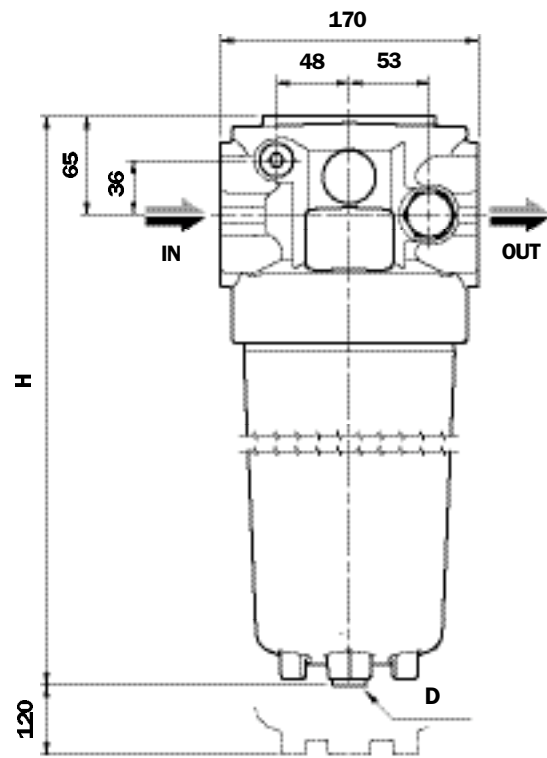

LMP 401

Length 2-3-4

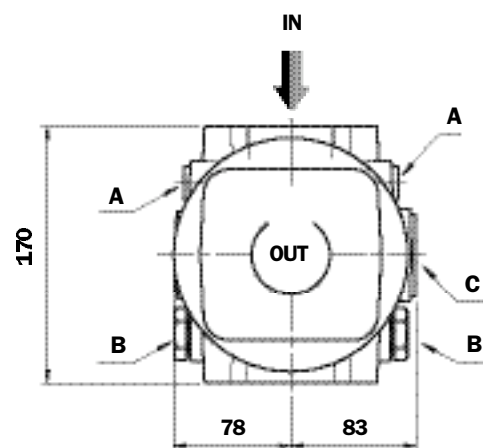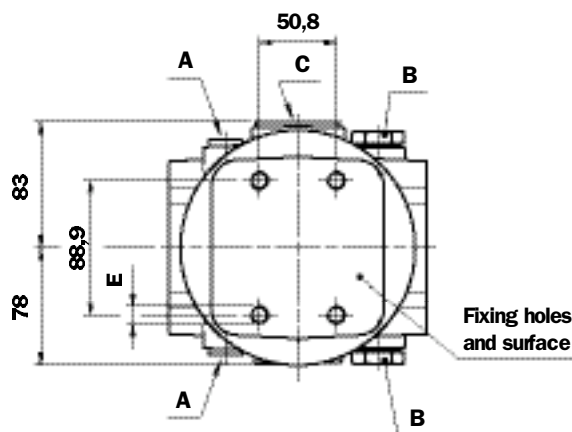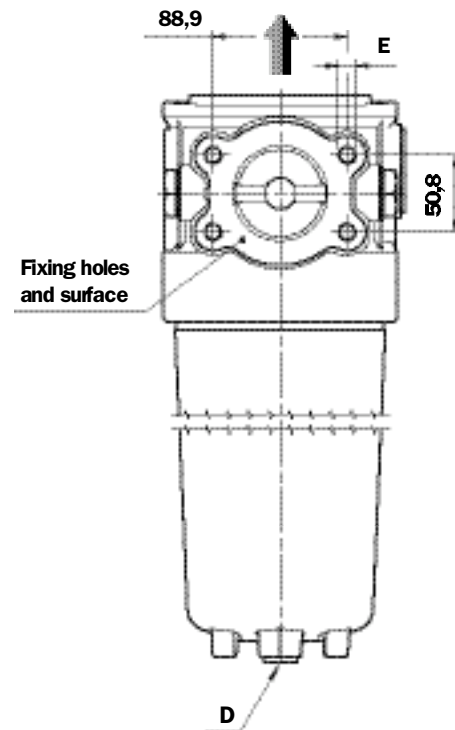

Flanged IN/OUT connections

E
Depth 20 mm

Threaded IN/OUT connections

E
Depth 20 mm

Length Filter

H
mm

2" SAE
3000 psi/M

M12

G 1 1/2"

M12

2

378

2 1/2" SAE
3000 psi/M

M12

G 2"

M12

3

478

2" SAE
3000 psi/UNC

1/2" UNC

1 1/2" NPT

1/2" UNC

4

578

2 1/2" SAE
3000 psi/UNC

1/2" UNC

2" NPT

1/2" UNC

SAE 24 - 1 7/8" - 12 UN

1/2" UNC

SAE 32 - 2 1/2" - 12 UN

1/2" UNC

A Breather plug - G 3/8" - Ch. 8


B Indicator connection - Plug T2 - Ch. 30

C Bypass valve - Ch. 17

D Oil drain plug - G 3/8" - Ch. 8




LMP 400

Length 5 - 6

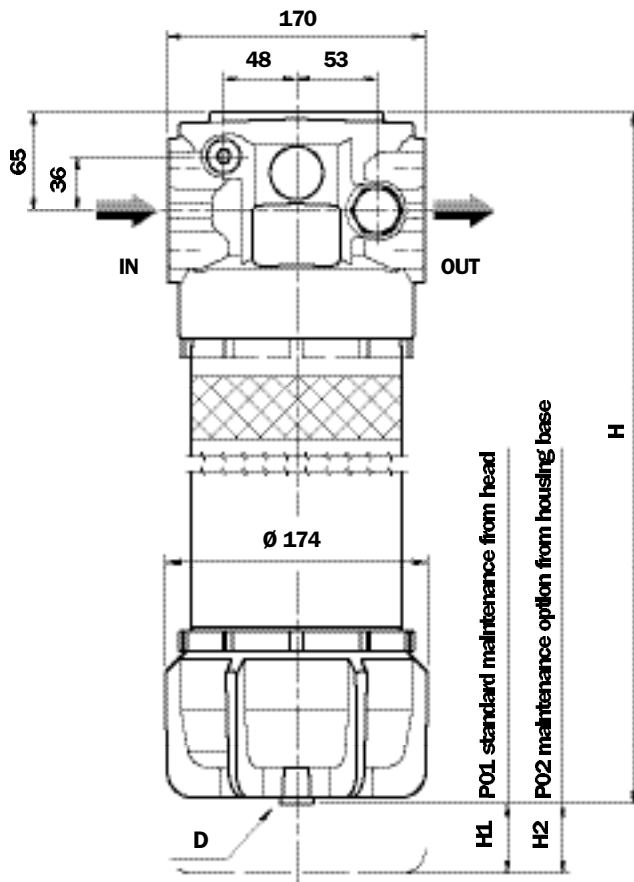

LMP 401

Length 5 - 6

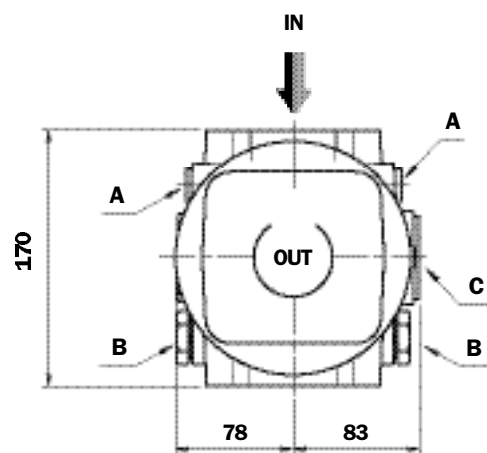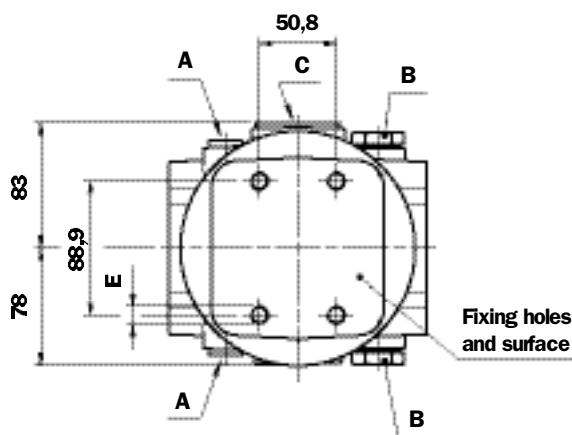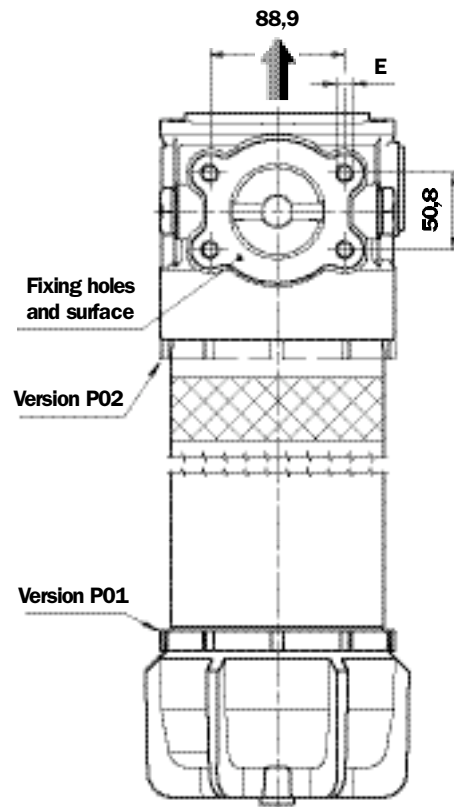


Length Filter	H mm	H1 mm	H2 mm
5	828	120	660
6	1158	120	990

- A Breather plug - G 3/8" - Ch. 8
- B Indicator connection - Plug T2 - Ch. 30
- C Bypass valve - Ch. 17
- D Oil drain plug - G 3/8" - Ch. 8




LMP 430

Length 5 - 6

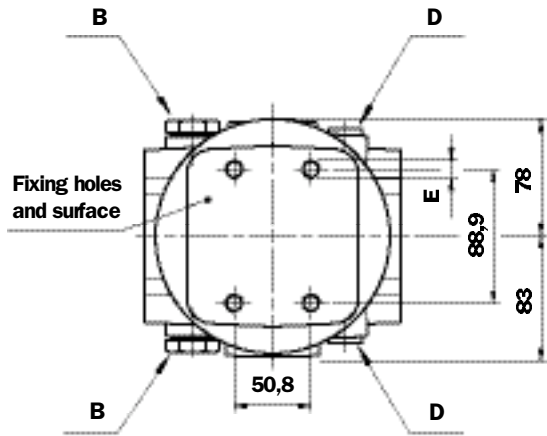


LMP 431

Length 5 - 6

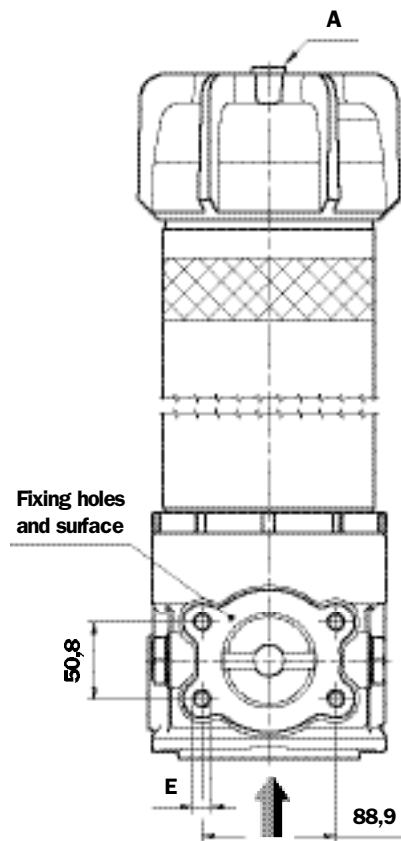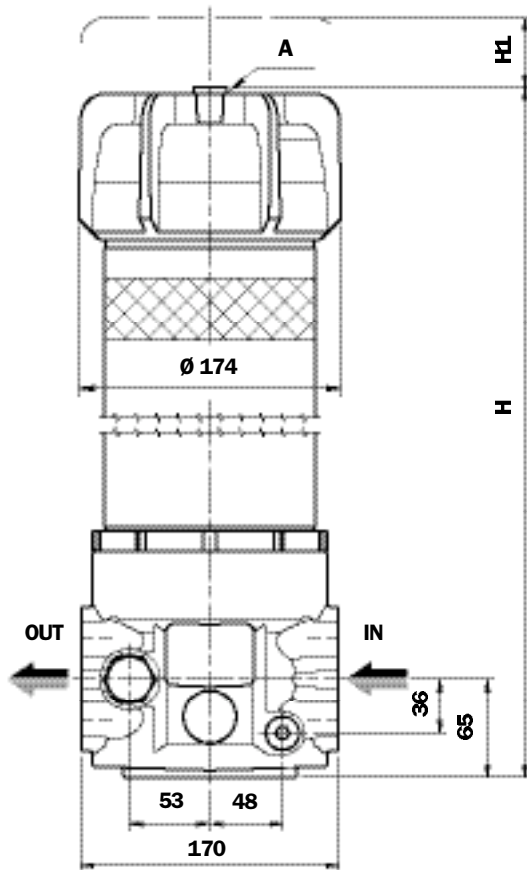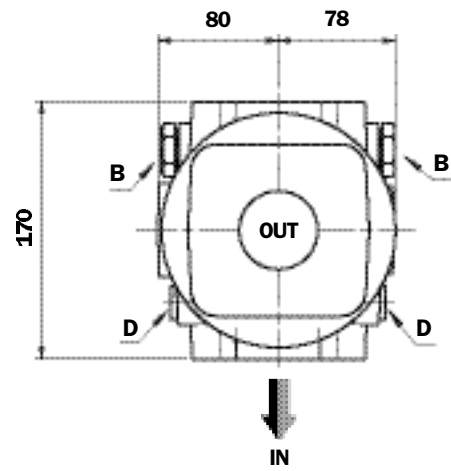

LMP400/401 spare parts


Length 2, 3, 4

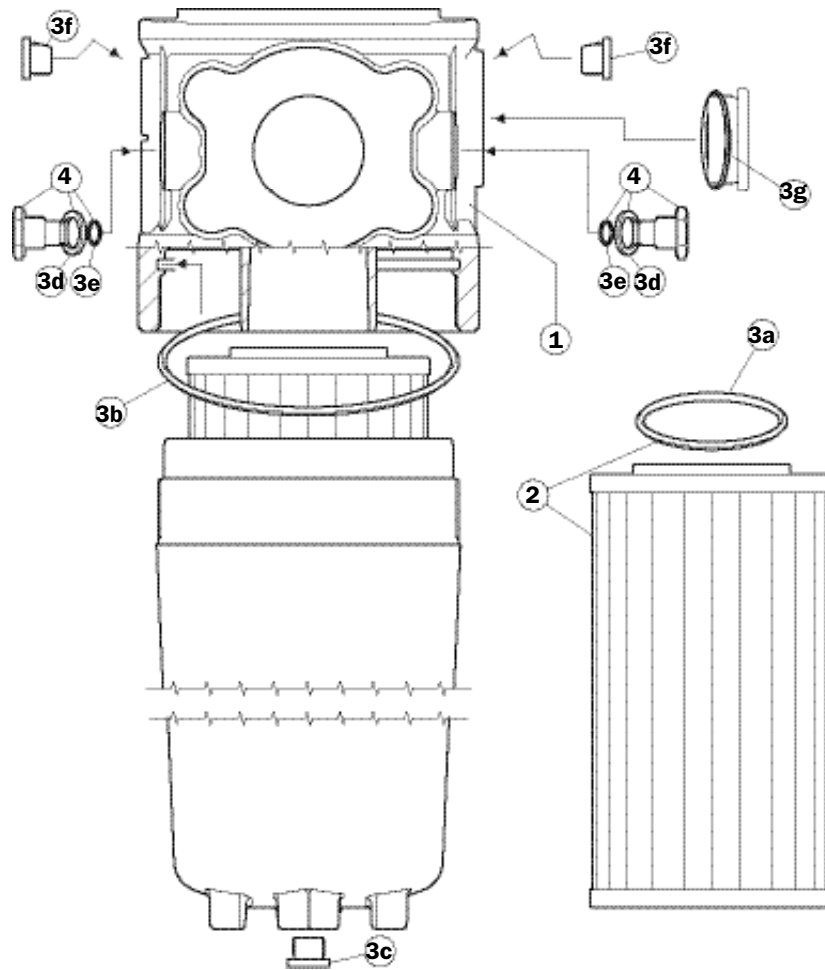

Pos.	Description	Qty	FILTER Series	
			LMP 400/401 2 - 3 - 4	
1	Filter assembly	1	See order table	
2	Filter Element	1	See order table	
3	Seals kit	1	NBR 02050391	FPM 02050392
3a	Filter element O-Ring	1	O-R 3237 Ø 59,99 x 2,62	
3b	O-Ring for housing	1	O-R 4525 Ø 132,95 x 3,53	
3c	Oil drain plug	1	G 3/8" with seal	
3d	Bonded seal	2	01030058	01030046
3e	O-Ring	2	O-R 2050 Ø 12,42 x 1,78	
3f	Breather plug	2	01029436	
3g	By-pass plug O-Ring	1	O-R 3193 Ø 48,90 x 2,62	
4	Indicator connection plug	2	T2H	T2V
-	Indicators	1	See order table	

LMP 400/401 spare parts


Length 5, 6

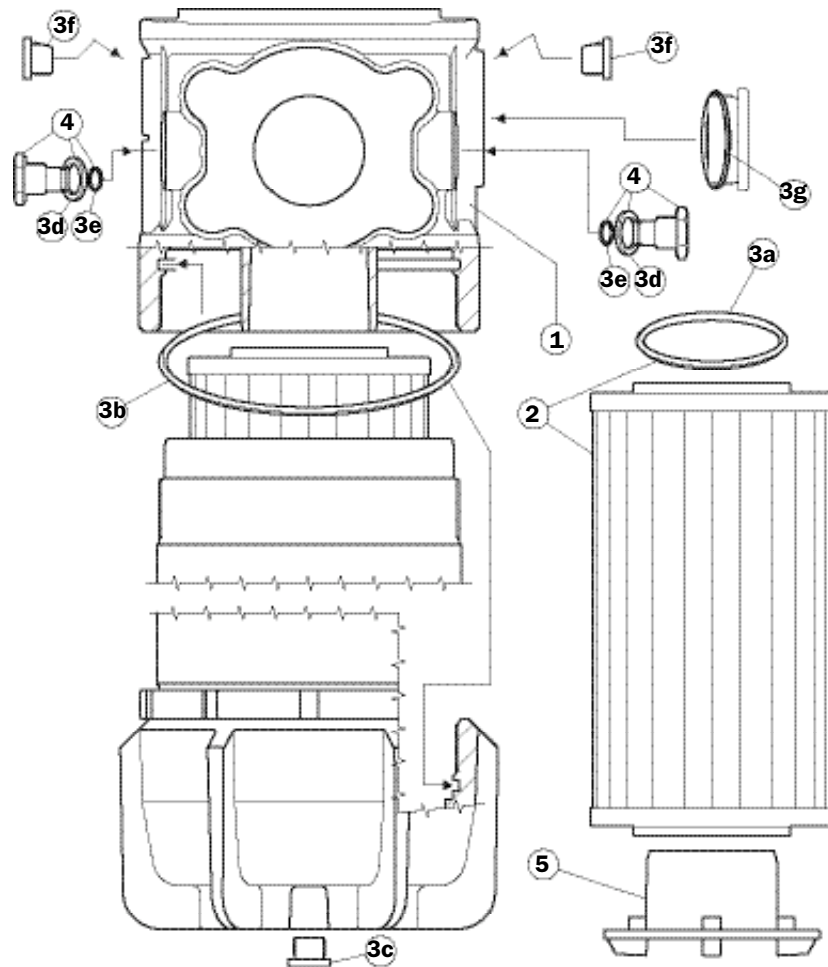

Pos.	Description	Qty	FILTER Series LMP 400/401 5 - 6	
1	Filter assembly	1	See order table	
2	Filter Element	1	See order table	
3	Seals kit	1	NBR 02050393	FPM 02050394
3a	Filter element O-Ring	2	O-R 3237 Ø 59,99 x 2,62	
3b	O-Ring for housing	2	O-R 4525 Ø 132,95 x 3,53	
3c	Oil drain plug	1	G 3/8" with seal	
3d	Bonded seal	2	01030058	01030046
3e	O-Ring	2	O-R 2050 Ø 12,42 x 1,78	
3f	Breather plug	2	01029436	
3g	By-pass plug O-Ring	1	O-R 3193 Ø 48,90 x 2,62	
4	Indicator connection plug	2	T2H	T2V
5	Housing spigot	1	01044108	
-	Indicators	1	See order table	

LMP430/431 spare parts

Length 5, 6

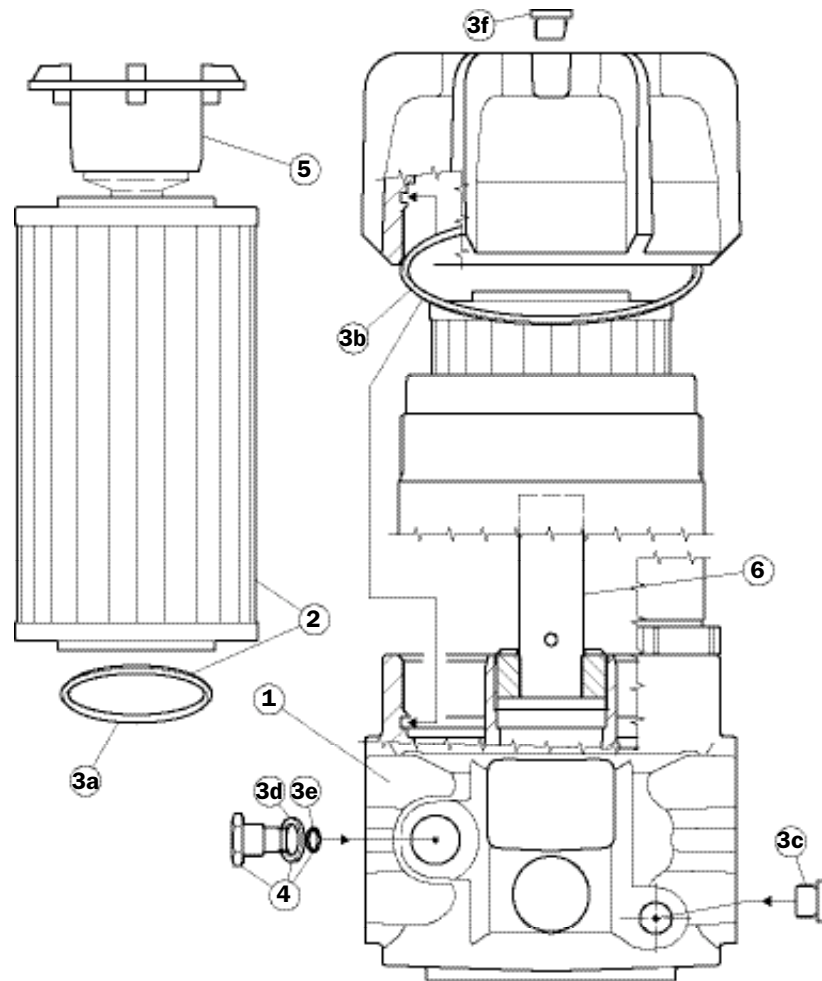

Pos.	Description	Qty	FILTER Series LMP 430/431 5 - 6	
1	Filter assembly	1	See order table	
2	Filter Element	1	See order table	
3	Seals kit	1	NBR 02050395	FPM 02050396
3a	Filter element O-Ring	2	O-R 3237 Ø 59,99 x 2,62	
3b	O-Ring for housing	2	O-R 4525 Ø 132,95 x 3,53	
3c	Oil drain plug	2	G 3/8" with seal	
3d	Bonded seal	2	01030058	01030046
3e	O-Ring	2	O-R 2050 Ø 12,42 x 1,78	
3f	Breather plug	1	01029436	
4	Indicator connection plug	2	T2H	T2V
5	Housing spigot	1	Spigot no by-pass 01044108 Spigot with by-pass 02001414	
6	Tube assembly	1	Length 5 - 02025041 Length 6 - 02025042	
-	Indicators	1	See order table	

Ordering information LMP400÷431

Filter assembly LMP

Example: LMP

1	2	3	4	5	6	7	8 a
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
400	4	B	A	G3	A10	N	P01

Filter Element CU 400

Example: CU400

2	6	4	7	8 b
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
4	A10	A	N	P01

1 - Sizes

400	430
401	431

2 - Filter length

2	LMP 430 - 431 excluded
3	
4	
5	
6	

3 - Valves

S	Without by-pass
B	With by-pass

4 - Seals

A	NBR
V	FPM (series P10 - P25 filter elements excluded)

5 - Connections

Type

G1	G 1 1/2"
G2	G 2"
G3	1 1/2" NPT
G4	2" NPT
G5	SAE 24 (1 7/8" 12 UN)
G6	SAE 32 (2 1/2" 12 UN)
F1	2" SAE 3000 PSI/M
F2	2 1/2" SAE 3000 PSI/M
F3	2" SAE 3000 PSI/UNC
F4	2 1/2" SAE 3000 PSI/UNC

6 - Filter element

A03	3 µm	A16	16 µm	Absolute filtration Inorganic microfibre βx (c) ≥ 1000 see page 9
A06	6 µm	A25	25 µm	
A10	10 µm			
M25	25 µm	M90	90 µm	Nominal Filtration Metal mesh see page 9
M60	60 µm			
P10	10 µm			Nominal Filtration Cellulose see page 9
P25	25 µm			

7 - Filter elements series

N	Δp 20 bar
W	Δp 20 bar (aqueous emulsions - water and glycol, not available for series P10 - P25 filter elements)

8 - Options

a - Filter

P01	MP Standard filters
P02	LMP 400 - 401 Maintenance from base of housing (lengths 5 and 6 only)
P02	LMP 430 - 431 With internal tube for reduced flow rate
Pxx	Customer request

b - Filter elements

P01	MP Standard filters
Pxx	Customer request

DIFFERENTIAL INDICATORS (see page 12)

MP Filtri - The filter functions as described in this bulletin are valid exclusively for original MP Filtri filter elements and replacement parts. All rights reserved

The data in this publication are purely guideline. MP Filtri reserves the right to make changes to the models described herein at any time it deems fit in relation to technical or commercial requirements. The colours of the products shown on the cover are purely guideline. Copyright. All rights reserved.