


cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6





Dimensions and technical characteristics are not binding

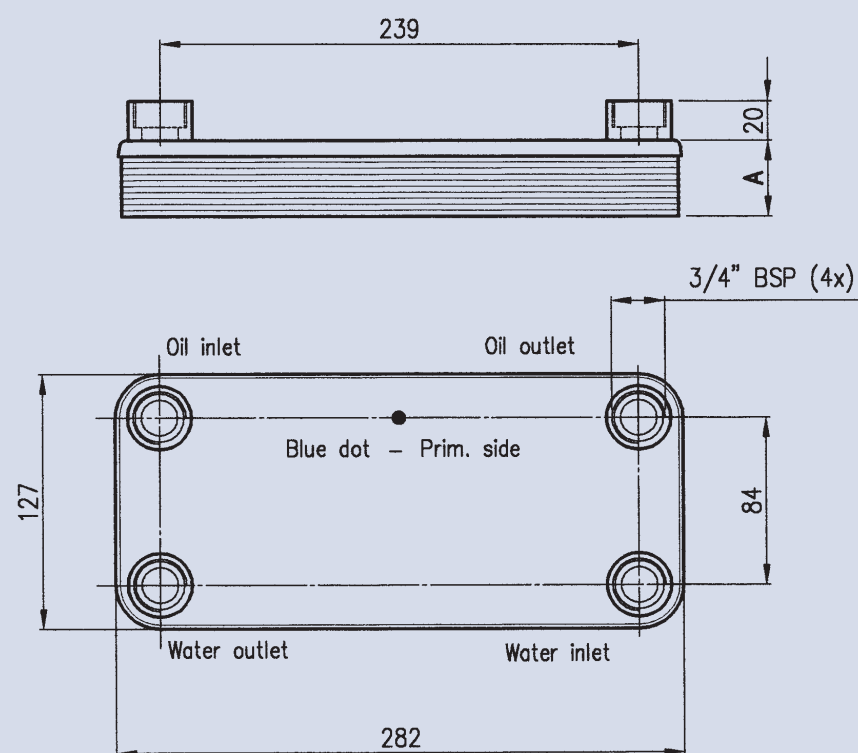


Type	Surface m ²	Oil flow l/min	Cooling capacity kW/°C	Weight kg	Dimensions A
M18-10	0,195	10 ÷ 30	0,09 ÷ 0,27	2,5	28
M18-20	0,390	20 ÷ 60	0,25 ÷ 0,55	3,7	47
M18-30	0,585	30 ÷ 90	0,45 ÷ 0,83	4,8	66
M18-40	0,780	40 ÷ 120	0,60 ÷ 1,17	6,0	85
M18-50	0,975	50 ÷ 150	0,85 ÷ 1,40	7,2	104

TABLE

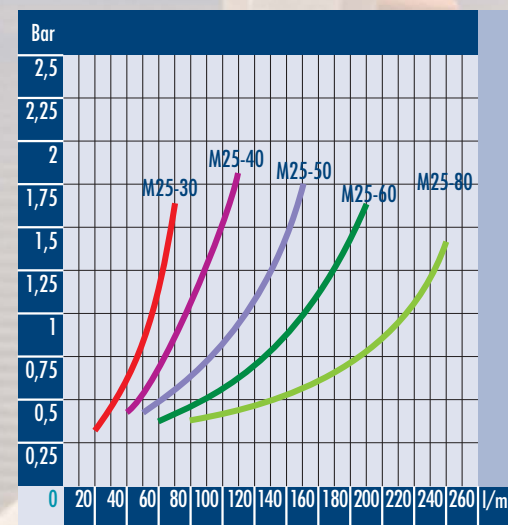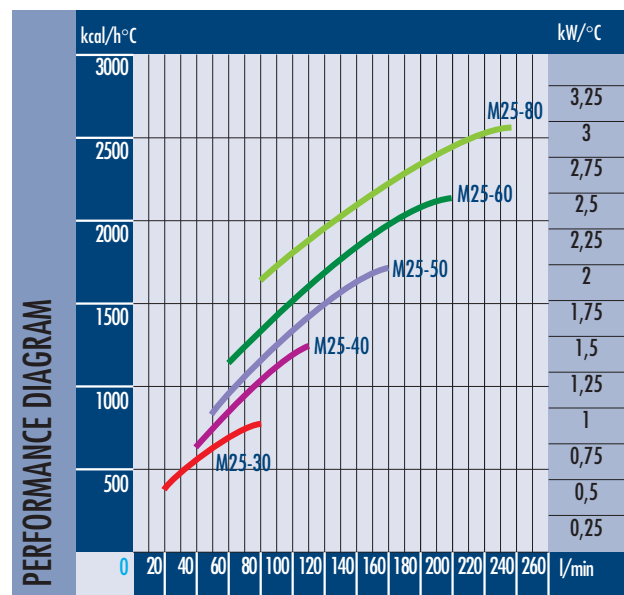

cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6



CORRECTION FACTOR

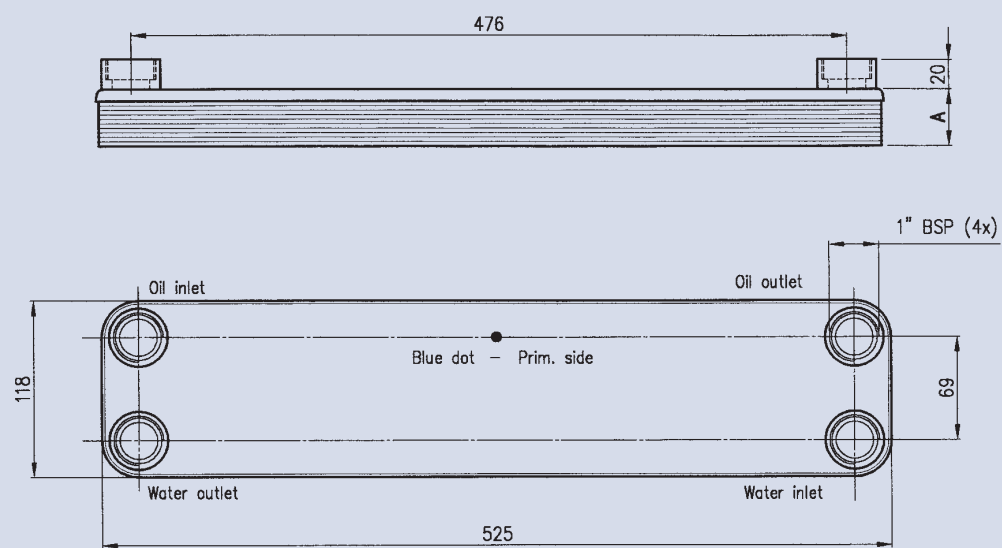

Dimensions and technical characteristics are not binding


Type	Surface m ²	Oil flow l/min	Cooling capacity kW/°C	Weight kg	Dimensions A
M25-30	1,05	20 ÷ 80	0,49 ÷ 0,91	8,3	87
M25-40	1,40	40 ÷ 120	0,80 ÷ 1,49	10,3	112
M25-50	1,75	50 ÷ 160	1,00 ÷ 2,00	12,3	138
M25-60	2,10	60 ÷ 200	1,30 ÷ 2,50	14,3	164
M25-80	2,80	80 ÷ 240	1,90 ÷ 3,00	18,3	215

TABLE

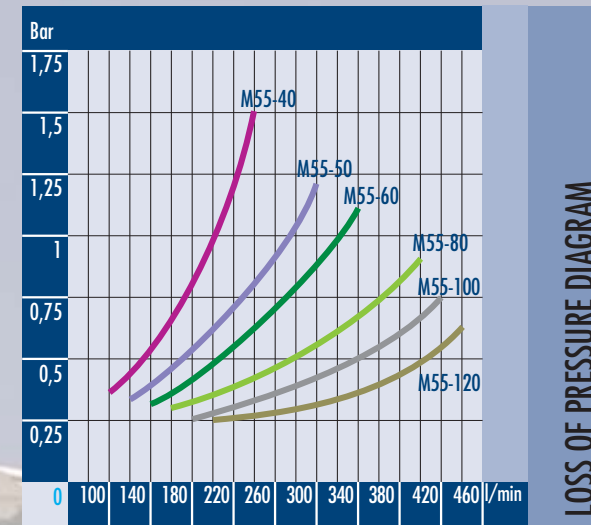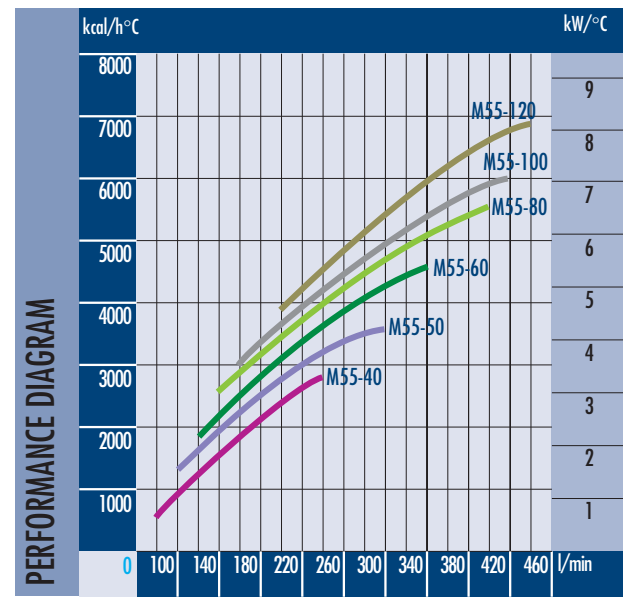

cSt	22	30	46	68	100	150	220
f	0,4	0,6	1	1,5	2,3	3,3	4,6

CORRECTION FACTOR

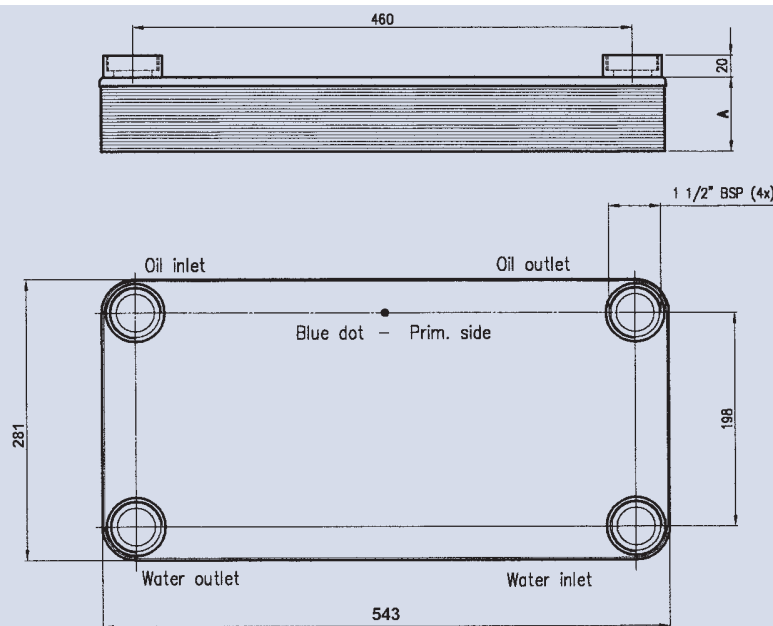

Dimensions and technical characteristics are not binding



Type	Surface m ²	Oil flow l/min	Cooling capacity kW/°C	Weight kg	Dimensions A
M55-40	2,8	80 ÷ 240	0,68 ÷ 3,24	25,7	115
M55-50	3,5	100 ÷ 300	1,47 ÷ 4,13	30,1	141
M55-60	4,2	120 ÷ 340	2,03 ÷ 5,20	34,5	167
M55-80	5,6	140 ÷ 400	2,77 ÷ 6,25	43,3	219
M55-100	7,0	160 ÷ 420	3,43 ÷ 7,00	52,1	271
M55-120	8,4	200 ÷ 440	4,41 ÷ 8,00	60,9	323

TABLE